
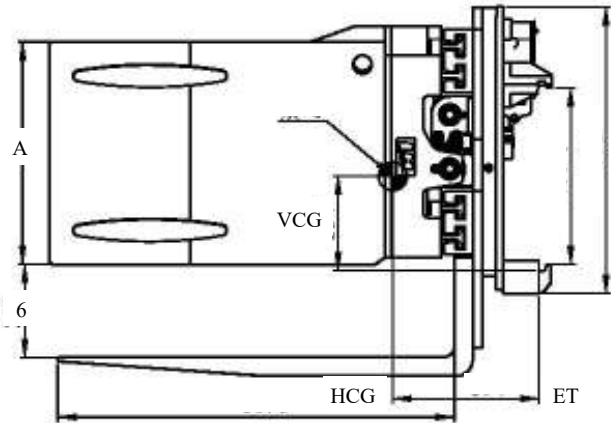


FORKLIFT ATTACHMENTS, FORKS, ACCESSORIES & PARTS

GAYLORD CLAMPS

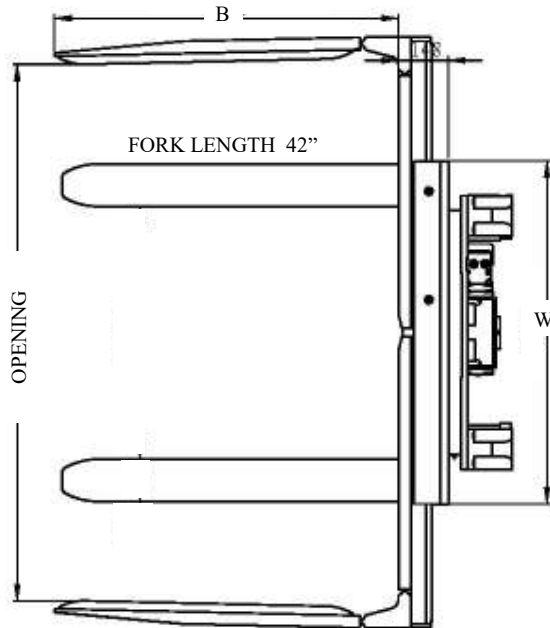

Capacity@ 24" LC	Catalog Order No.	Mounting Class	Fork OTO	Opening Range	HEIGHT A	LENGTH B	FRAME W	Arm Thick.	VCG	WT / LB	ET	HCG
3500	GA20D-GFR-01A	II	34.5	24-64	24	36	40	2.8	8.7	1640	14.3	10.6
3500	GA20D-GFR-01B	III	34.5	24-64	24	42	40	2.8	8.7	1750	14.3	11.3
5000	GA20D-GFR-02A	II	34.5	24-64	24	44	40	2.8	8.7	2310	14.8	9.7
5000	GA20D-GFR-02B	III	34.5	24-64	24	44	40	2.8	8.7	2340	14.8	9.8

Rotate & Clamp: 2 hydraulic functions required
Maximum operating psi: 2000 PSI

Recommended flow rate: 8-12 GPM

Optional:

Special opening ranges
Arm sizes
Quick change mounting
Solenoid selector valve
Relief valve

Forks assembly bolted to faceplate.

Class II or class III mountings.


Hydraulic lock valves hold pressure against the load.

E-profile, bushed aluminum frame for durability and strength.

Various openings and arm lengths available.

Various fork sizes available

Arms are rubber covered. Steel arms available, no rubber.

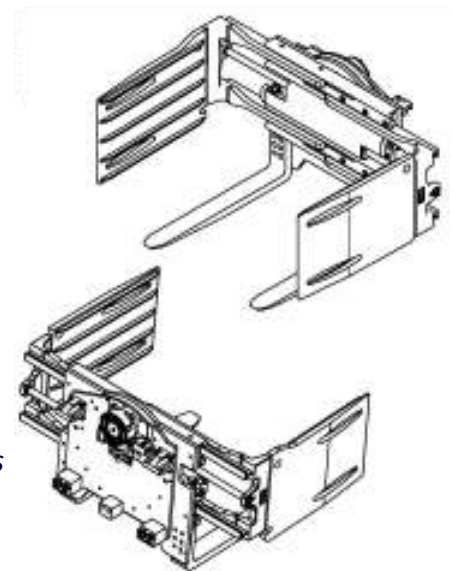

mail:
2301 South Mission Circle
Friendswood, TX 77546

PH: 888-367-5260
FX: 281-692-1450/
281-992-2040

Phys.:
19113 Amoco Drive So.
Alvin, TX 77511